




HS

SERIES

轻负荷
Light Duty

孔用
Internal

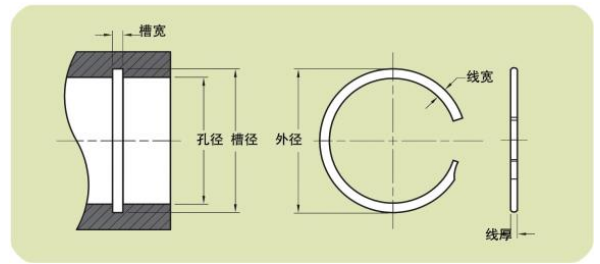

型号	孔径	环 (MM)				槽 (MM)		强度 (KN) ³
		外径	线宽	线厚	槽径	槽宽		
HS-6	6	6.35	0.51	0.30	6.30	0.38	1.99	
HS-7	7	7.38	0.51	0.30	7.32	0.38	2.32	
HS-8	8	8.44	0.64	0.38	8.36	0.46	3.18	
HS-9	9	9.54	0.76	0.38	9.46	0.46	3.58	
HS-10	10	10.58	0.76	0.38	10.50	0.46	3.98	
HS-11	11	11.68	0.89	0.38	11.60	0.46	4.39	
HS-12	12	12.74	0.89	0.38	12.66	±0.05	4.77	
HS-13	13	13.80	1.14	0.46	13.72	0.56	6.26	
HS-14	14	14.80	1.14	0.46	14.72	0.56	6.74	
HS-15	15	15.80	1.14	0.46	15.72	0.56	7.22	
HS-16	16	16.80	1.14	0.46	16.72	0.56	7.71	
HS-17	17	17.82	1.14	0.46	17.72	0.56	8.19	
HS-18	18	18.82	1.14	0.46	18.72	0.56	8.67	
HS-19	19	19.86	1.14	0.46	19.76	0.56	9.15	
HS-20	20	21.26	1.65	0.53	±0.04	21.06	±0.05/-0	11.10
HS-21	21	22.27	1.65	0.53	±0.08	22.06	±0.05/-0	11.65
HS-22	22	23.28	1.65	0.53	±0.08	23.06	±0.05/-0	12.21
HS-24	24	25.29	1.65	0.53	±0.08	25.06	±0.05/-0	13.32
HS-25	25	26.30	1.65	0.53	±0.08	26.06	±0.05/-0	13.87
HS-26	26	27.31	1.65	±0.10	±0.08	27.06	±0.05/-0	14.43
HS-28	28	29.40	2.24	0.64	±0.10	29.12	±0.05/-0	16.30
HS-29	29	30.41	2.24	0.64	±0.10	30.12	±0.05/-0	16.88
HS-30	30	31.42	2.24	0.64	±0.10	31.12	±0.05/-0	17.47
HS-31	31	32.43	2.24	0.64	±0.10	32.12	±0.05/-0	18.05
HS-32	32	33.44	2.24	0.64	±0.10	33.12	±0.05/-0	18.63
HS-34	34	35.45	2.24	0.64	±0.10	35.12	±0.05/-0	19.80
HS-35	35	36.47	2.24	0.64	±0.10	36.12	±0.05/-0	20.38
HS-36	36	37.48	2.24	0.64	±0.10	37.12	±0.05/-0	20.96
HS-37	37	38.49	2.24	0.64	±0.10	38.12	±0.05/-0	21.54
HS-38	38	39.50	2.24	0.64	±0.10	39.12	±0.05/-0	22.12
HS-40	40	41.94	3.00	0.79	±0.10	41.48	±0.05/-0	28.75
HS-42	42	43.96	3.00	0.79	±0.10	43.48	±0.05/-0	30.19
HS-45	45	46.99	3.00	0.79	±0.10	46.48	±0.05/-0	32.34
HS-47	47	49.00	3.00	0.79	±0.10	48.48	±0.13	33.78
HS-48	48	50.01	3.00	0.79	±0.05	49.48	±0.05/-0	34.50
HS-50	50	52.04	3.00	0.79	±0.05	51.48	±0.05/-0	35.93
HS-52	52	54.55	4.01	0.79	±0.05	53.94	±0.05/-0	37.37
HS-55	55	57.57	4.01	0.79	±0.05	56.94	±0.05/-0	39.53
HS-56	56	58.58	4.01	0.79	±0.15	57.94	±0.05/-0	40.25
HS-58	58	60.60	4.01	0.79	±0.15	59.94	±0.05/-0	41.68




HS

SERIES

轻负荷
Light Duty

孔用
Internal

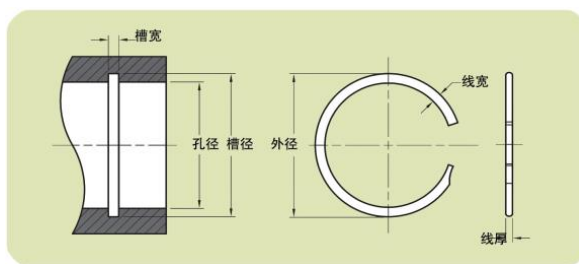

型号	孔径	环 (MM)				槽 (MM)		强度 (KN) ³			
		外径		线宽	线厚	槽径	槽厚				
HS-60	60	62.64		4.01		0.79		61.94	0.99	43.12	
HS-62	62	64.67		4.01		0.79		63.94	0.99	44.45	
HS-63	63	65.69		4.01		0.79		64.94	0.99	45.28	
HS-65	65	67.70	+0.64/-0	4.01	±0.10	0.79	±0.05	66.94	0.99	46.72	
HS-68	68	70.72		4.01		0.79		69.94	0.99	48.87	
HS-70	70	72.74		4.01		0.79		71.94	0.99	50.31	
HS-72	72	74.77		4.01		0.79		73.94	0.99	51.75	
HS-75	75	77.80		4.01		0.79		76.94	0.99	53.90	
HS-78	78	81.20		4.78		0.99		80.34	1.12	70.25	
HS-80	80	83.23		4.78		0.99		82.34	1.12	+0.08/-0	72.05
HS-82	82	85.25		4.78		0.99		84.34	1.12		73.85
HS-85	85	88.29		4.78		0.99		87.34	±0.15	1.12	76.55
HS-88	88	91.32		4.78		0.99		90.34	1.12		79.26
HS-90	90	93.36	+0.76/-0	4.78		0.99		92.34	1.12		81.06
HS-92	92	95.37		4.78		0.99		94.34	1.12		82.86
HS-95	95	98.39		4.78		0.99		97.34	1.12		85.56
HS-98	98	101.41		4.78		0.99		100.34	1.12		88.26
HS-100	100	103.43		4.78		0.99		102.34	1.12		90.06
HS-102	102	105.44		4.78		0.99		104.34	1.12		91.87
HS-105	105	108.92		5.72		1.17		107.80	1.32		106.44
HS-110	110	113.98		5.72		1.17		112.80	1.32		111.51
HS-112	112	116.01		5.72		1.17		114.80	1.32		113.54
HS-115	115	119.12	+0.89/-0	5.72	+0	1.17		117.88	1.32		116.58
HS-120	120	124.30		5.72	-0.13	1.17		123.00	1.32		121.65
HS-125	125	129.47		5.72		1.17		128.12	1.32		126.71
HS-130	130	134.66		5.72		1.17		133.26	1.32		131.78
HS-135	135	139.83		5.72		1.55		138.38	±0.18	1.70	181.30
HS-140	140	145.00		5.72		1.55	+0	143.50	1.70		188.01
HS-150	150	155.30		6.73		1.55	-0.05	153.76	1.70		201.44
HS-155	155	160.46	+1.14/-0	6.73		1.55		158.88	1.70	+0.10/-0	208.16
HS-160	160	165.64		6.73		1.55		164.00	1.70		214.87
HS-165	165	170.82		6.73		1.55		169.13	1.70		221.59
HS-170	170	175.99		6.73		1.55		174.25	1.70		228.30
HS-175	175	181.17		6.73		1.55		179.38	1.70		235.02
HS-180	180	186.35		6.73		1.55		184.50	1.70		241.73
HS-185	185	191.52		6.73		1.55		189.63	1.70		248.45
HS-190	190	196.70		6.73		1.55		194.75	1.70		255.16
HS-195	195	201.87	+1.52/-0	7.62		1.55		199.88	1.70		261.88
HS-200	200	207.05		7.62		1.55		205.00	1.70		268.59
HS-210	210	217.40		7.62		1.55		215.25	±0.20	1.70	282.02
HS-220	220	227.76		8.76		1.93		225.50	2.08		367.88
HS-230	230	238.11		8.76		1.93		235.75	2.08		384.60
HS-240	240	248.46		8.76	+0	1.93		246.00	2.08		401.33
HS-250	250	258.81		8.76	-0.15	1.93		256.25	2.08		418.05
HS-260	260	269.17	+1.78/-0	9.65		1.93		266.50	2.08	+0.13/-0	434.77
HS-270	270	279.52		9.65		1.93		276.75	2.08		451.49
HS-280	280	289.87		9.65		1.93		287.00	2.08		468.21
HS-290	290	300.22		9.65		1.93		297.25	2.08		484.94
HS-300	300	310.58		9.65		1.93		307.50	2.08		501.66