

等截面挡圈




www.bolispring.com
bolispring@aliyun.com
+86-577-62799797

SBL

SERIES

YJT-1068标准
M-2300
SB
(仅适用于挡圈)
SNAP RINGS FOR BORES

孔用
Internal

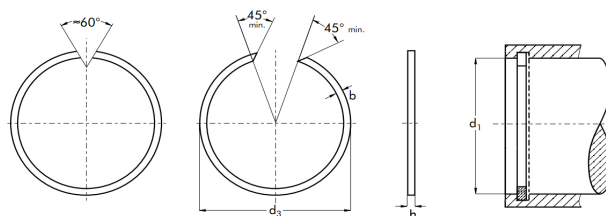

型号 孔径 d		SBL-7	SBL-8	SBL-9	SBL-10	SBL-11	SBL-12	SBL-13	SBL-14	SBL-15
h	小于	0.8	0.8	0.8	0.8	1.0	1.0	1.0	1.0	1.0
	大于	0.7	0.7	0.7	0.7	0.9	0.9	0.9	0.9	0.9
b	小于	1.0	1.0	1.1	1.2	1.3	1.3	1.3	1.3	1.3
	大于	0.9	0.9	1.0	1.1	1.2	1.2	1.2	1.2	1.2
d_c	小于	7.5	8.5	9.5	10.6	11.6	12.7	13.8	14.8	15.8
1K units ≈ kg		0.09	0.10	0.13	0.15	0.21	0.25	0.28	0.31	0.34

型号 孔径 d		SBL-16	SBL-17	SBL-18	SBL-19	SBL-20	SBL-21	SBL-22	SBL-23	SBL-24
h	小于	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
	大于	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
b	小于	1.60	1.70	1.75	1.75	1.75	1.75	1.75	1.75	1.75
	大于	1.50	1.60	1.65	1.65	1.65	1.65	1.65	1.65	1.65
d_c	小于	16.8	17.8	18.9	19.9	21.0	22.0	23.0	24.0	25.2
1K units ≈ kg		0.53	0.55	0.68	0.72	0.76	0.79	0.81	0.88	0.90

型号 孔径 d		SBL-25	SBL-26	SBL-27	SBL-28	SBL-29	SBL-30	SBL-31	SBL-32	SBL-33
h	小于	1.2	1.2	1.2	1.2	1.2	1.5	1.5	1.5	1.5
	大于	1.1	1.1	1.1	1.1	1.1	1.4	1.4	1.4	1.4
b	小于	1.75	1.75	1.75	1.75	1.75	2.30	2.30	2.30	2.30
	大于	1.65	1.65	1.65	1.65	1.65	2.20	2.20	2.20	2.20
d_c	小于	26.2	27.2	28.2	29.2	30.2	31.4	32.4	33.4	34.4
1K units ≈ kg		0.91	0.98	1.11	1.13	1.15	2.00	2.03	2.11	2.26

型号 孔径 d		SBL-34	SBL-35	SBL-37	SBL-38	SBL-39	SBL-40	SBL-42	SBL-43	SBL-44
h	小于	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	大于	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
b	小于	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3
	大于	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
d_c	小于	35.4	36.4	38.8	39.8	40.8	41.8	43.8	44.8	45.8
1K units ≈ kg		2.34	2.36	2.53	2.61	2.67	2.80	2.92	3.03	3.11

等截面挡圈




www.bolispring.com
bolispring@aliyun.com
+86-577-62799797

SBL

SERIES

YJT-1068标准
 号:2200
 SB
 (按截齿标准)
 SNAP RINGS FOR BORES

孔用
 Internal

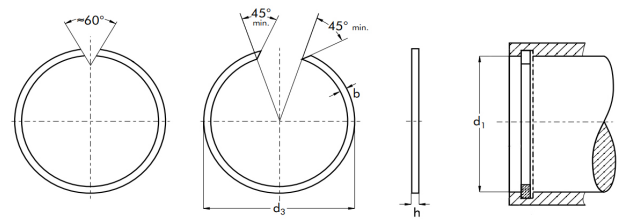

型号 孔径 d	SBL-45	SBL-46	SBL-47	SBL-48	SBL-50	SBL-52	SBL-53	SBL-55	SBL-57
h 小于	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
h 大于	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
b 小于	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3
b 大于	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
d_c 小于	46.8	47.8	48.8	49.8	51.8	54.3	55.3	57.3	59.3
1K units ≈ kg	3.25	3.28	3.29	3.45	3.57	3.58	3.82	3.93	4.12

型号 孔径 d	SBL-58	SBL-60	SBL-62	SBL-63	SBL-65	SBL-68	SBL-70	SBL-72	SBL-73
h 小于	1.5	1.5	1.5	1.5	1.5	1.5	1.5	2.0	2.0
h 大于	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.9	1.9
b 小于	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.8	2.8
b 大于	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.7	2.7
d_c 小于	60.3	62.3	64.3	65.3	67.3	70.3	72.3	74.6	75.6
1K units ≈ kg	4.13	4.28	4.42	4.50	4.72	4.90	4.93	8.49	8.52

型号 孔径 d	SBL-74	SBL-76	SBL-78	SBL-79	SBL-80	SBL-81	SBL-82	SBL-83	SBL-85
h 小于	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
h 大于	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9
b 小于	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8
b 大于	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7
d_c 小于	76.6	78.6	80.6	81.6	82.6	83.6	84.6	85.6	87.6
1K units ≈ kg	8.60	8.89	9.05	9.07	9.22	9.31	9.45	9.63	9.81

型号 孔径 d	SBL-86	SBL-88	SBL-90	SBL-92	SBL-93	SBL-95	SBL-97	SBL-98	SBL-100
h 小于	2.0	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
h 大于	1.9	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
b 小于	2.8	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
b 大于	2.7	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
d_c 小于	88.6	91.0	93.0	95.0	96.0	98.0	100.0	101.0	103.0
1K units ≈ kg	9.91	15.40	15.60	16.60	16.80	16.90	17.10	17.50	17.90

等截面挡圈




www.bolispring.com
bolispring@aliyun.com
+86-577-62799797

SBL

SERIES

YJT-1068标准
M-2300
SB
(等截面挡圈)
SNAP RINGS FOR BORES

孔用
Internal

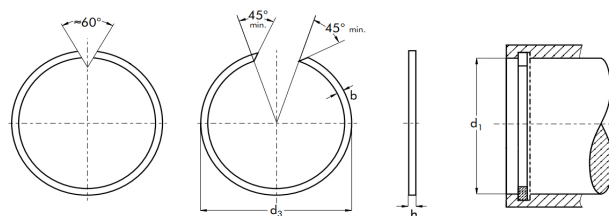

型号 孔径 d		SBL-102	SBL-103	SBL-105	SBL-107	SBL-108	SBL-110	SBL-112	SBL-113	SBL-115
h	小于	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
	大于	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
b	小于	3.40	3.40	3.40	3.40	3.40	3.40	3.40	3.40	3.40
	大于	3.30	3.30	3.30	3.30	3.30	3.30	3.30	3.30	3.30
d_c	小于	105.3	106.3	108.3	110.3	111.3	113.4	115.4	116.4	118.4
1K units ≈ kg		18.4	18.5	18.7	19.1	19.3	19.8	20.3	20.5	20.6

型号 孔径 d		SBL-117	SBL-118	SBL-120	SBL-120	SBL-125	SBL-127	SBL-130	SBL-133	SBL-135
h	小于	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
	大于	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
b	小于	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
	大于	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
d_c	小于	120.4	121.4	123.5	126.5	128.5	130.5	133.6	136.6	138.6
1K units ≈ kg		20.8	21.1	21.4	22.0	22.5	23.0	23.4	24.4	25.0

型号 孔径 d		SBL-137	SBL-140	SBL-143	SBL-150	SBL-153	SBL-160	SBL-163	SBL-165	SBL-170
h	小于	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
	大于	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
b	小于	3.4	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
	大于	3.3	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9
d_c	小于	140.6	144.0	147.0	154.1	157.1	164.2	167.2	169.2	174.3
1K units ≈ kg		25.3	29.3	30.1	31.9	32.6	34.4	34.6	34.9	36.2

型号 孔径 d		SBL-173	SBL-175	SBL-180	SBL-183	SBL-190	SBL-195	SBL-200	SBL-205	SBL-210
h	小于	2.5	2.5	2.5	2.5	3.0	3.0	3.0	3.0	3.0
	大于	2.4	2.4	2.4	2.4	2.9	2.9	2.9	2.9	2.9
b	小于	4.0	4.0	4.0	4.0	5.0	5.0	5.0	5.0	5.0
	大于	3.9	3.9	3.9	3.9	4.9	4.9	4.9	4.9	4.9
d_c	小于	177.3	179.3	184.5	187.5	194.9	199.9	205.0	210.0	215.1
1K units ≈ kg		37.1	37.3	38.3	41.0	61.3	61.6	64.5	66.4	68.8

等截面挡圈




www.bolispring.com
bolispring@aliyun.com
+86-577-62799797

SBL

SERIES

YJT-1068标准
M-2300
SBL
(恒截面挡圈)
SNAP RINGS FOR BORES

孔用
Internal

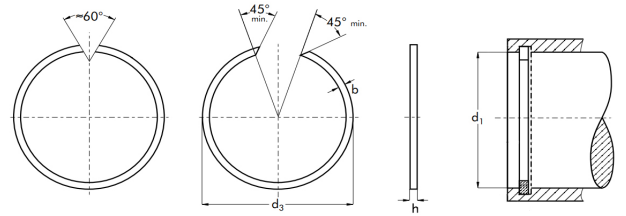

型号 孔径 d	SBL-215	SBL-220	SBL-225	SBL-230	SBL-240	SBL-250	SBL-260	SBL-270	SBL-280
h 小于	3.0	3.0	3.0	3.0	3.0	3.0	4.0	4.0	4.0
h 大于	2.9	2.9	2.9	2.9	2.9	2.9	3.9	3.9	3.9
b 小于	5.0	5.0	5.0	5.0	5.0	5.0	7.5	7.5	7.5
b 大于	4.9	4.9	4.9	4.9	4.9	4.9	7.4	7.4	7.4
d_c 小于	220.1	225.2	230.2	235.3	245.4	255.5	267.6	277.7	287.8
1K units ≈ kg	69.5	72.4	72.9	75.2	80.9	84.2	165.0	174.0	184.0

型号 孔径 d	SBL-290	SBL-300	SBL-310	SBL-320	SBL-325	SBL-330	SBL-340	SBL-350	SBL-355
h 小于	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
h 大于	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9
b 小于	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5
b 大于	7.4	7.4	7.4	7.4	7.4	7.4	7.4	7.4	7.4
d_c 小于	297.9	307.9	318.0	328.1	333.1	338.2	348.3	358.4	363.4
1K units ≈ kg	190.0	196.0	200.0	203.0	206.0	209.0	219.0	229.0	231.0

型号 孔径 d	SBL-360	SBL-370	SBL-375	SBL-380	SBL-390	SBL-395
h 小于	4.0	4.0	4.0	4.0	4.0	4.0
h 大于	3.9	3.9	3.9	3.9	3.9	3.9
b 小于	7.5	7.5	7.5	7.5	7.5	7.5
b 大于	7.4	7.4	7.4	7.4	7.4	7.4
d_c 小于	368.5	378.5	383.5	388.6	398.7	403.7
1K units ≈ kg	233.0	236.0	240.0	242.0	253.0	257.0

型号 孔径 d	SBL-400	SBL-410	SBL-415	SBL-420	SBL-430	SBL-440
h 小于	4.0	4.0	4.0	4.0	4.0	4.0
h 大于	3.9	3.9	3.9	3.9	3.9	3.9
b 小于	7.5	7.5	7.5	7.5	7.5	7.5
b 大于	7.4	7.4	7.4	7.4	7.4	7.4
d_c 小于	408.9	419.0	424.0	429.1	439.2	449.3
1K units ≈ kg	260.0	266.0	273.0	277.0	285.0	294.0